



The Series 5 for **Personal** Parking



Designed for the use of one driver with a dedicated parking space and supports monthly billing.

- Users will be able to charge their cars right at their assigned spots
- The SemaConnect Network allows you to easily manage EV Charging Stations and add new stations or drivers
- Drivers pay a monthly fee for their charging, plus the cost of electricity and parking at their designated spots

**Features**

**Wireless Technology**

Communicates with the network and produces real-time data

**Rugged Aluminum Enclosure**

Prevents damage from nature and natural elements

**Built-In Electricity Metering**

Manage your electricity cost

**For a Single Driver**

Users will be able to charge their cars right at their assigned spots

**Interactive LED Lights**

Quickly identify the station status

**Backlit LCD Screen**

Easy reading for costs and station status

**Smart Card Authentication**

Easy access for EV Drivers

**Convenient Access Panel**

Easy installation and connectivity

**J1772™ Plug**

Charges all electric or plug-in hybrid electric vehicles



Compact Design



Easy Installation



Simple Service Fee



Easy to Manage



Generate Revenue




Smart Grid Ready



Distributed by [powertechnologiesolutions.com](http://powertechnologiesolutions.com)  
100 Ashley Dr S, Tampa, FL 33402  
(813) 314-7617  
[sales@powertechnologiesolutions.net](mailto:sales@powertechnologiesolutions.net)



The Network. It's what makes the **Station** smart.

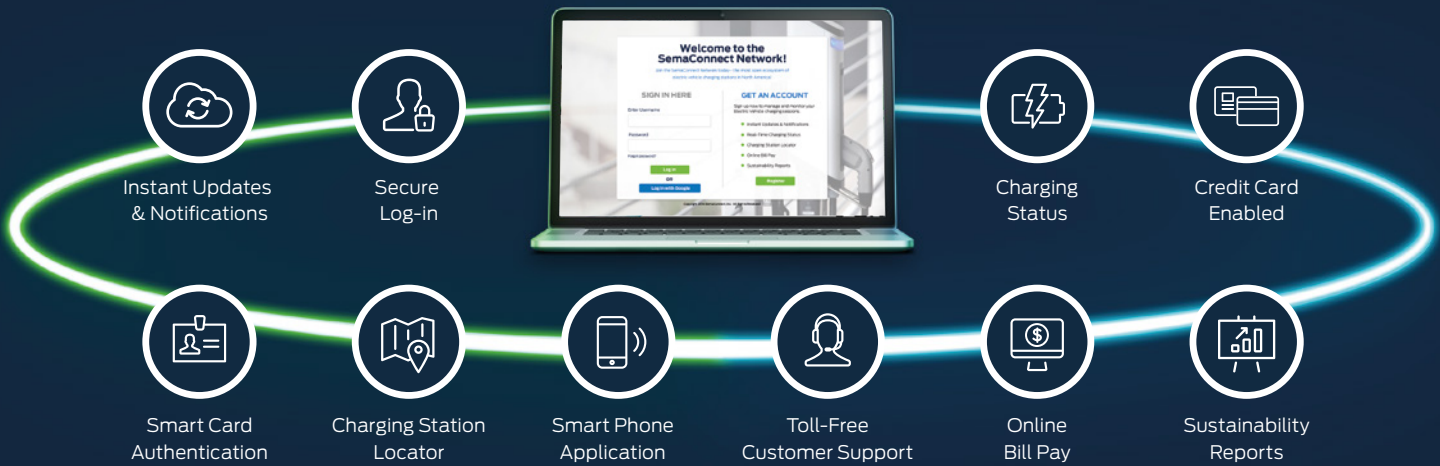

Designing the SemaConnect Station came with one goal in mind:

## To create the perfect electric vehicle charging station suitable for multifamily applications

the perfect charging station for apartments and condos. its compact form factor, ease of installation and comprehensive online management system make it the best choice for charging electric vehicles.

### Multiple mounting options:



single pedestal

double pedestal

wall mount

## SemaConnect 5 Series Technical Specifications

### Power Specification

AC Power Source	<b>208/240V, center grounded, 60Hz supply</b>
Power to Electric Vehicle	<b>30A maximum, 7.2kW@240VAC</b>
Branch Circuit Protector	<b>2-pole, common trip, 40AMP</b>
Vehicle-to-Charger Connection	<b>SAE J1772™ EV Connector via 18ft Cable</b>
Energy Metering Accuracy	<b>1% at 5min intervals; 0.5% capable</b>
Standby Power	<b>5 mA typical</b>

### Safety Specification

Personnel Protection System	<b>Charging Circuit Interrupting Device (CCID) Trip Threshold 5mA, CCID 5 per UL2231-2, Auto reset with 15min delay</b>
Automotive Unplug Detection Codes and Standards Compliance	<b>Charger output voltage terminated UL 2231-1, 2231-2 and UL2594 compliant, NEC Article 625 compliant</b>

### Network Specification

Wide Area Network	<b>Commercial CDMA or GPRS cellular network</b>
Network Security	<b>128-bit AES Encryption</b>
Smart Card Reader	<b>ISO 15693 (iCLASS), ISO14443 (MIFARE, DESFIRE)</b>

### Charger Status Displays

LED Array	<b>270° visibility, multi-color visual status indicator</b>
LCD Screen	<b>2 lines, 16 characters per line, backlit</b>

### Environmental Specs

Outdoor Rated	<b>NEMA 3R</b>
Operating Humidity	<b>Up to 95% non-condensing</b>
Operating Temperature	<b>-22 °F to 122 °F (-30 °C to +50 °C)</b>

### Other Specifications

Surge Protection	<b>6kV@ 3,000A per UL 2231-2,</b>
EMC Compliance	<b>FCC Part 15 Class A, IC RSS-210</b>
Approx. Shipping Weights	<b>Head unit and cable: 35 lbs, Bollard pedestal: 22lbs, Wall mount bracket: 8lbs</b>
Dimensions	<b>15in high x 6in wide x 6in deep</b>

**SemaConnect™**

Distributed by [powertechnologysolutions.com](http://powertechnologysolutions.com)  
100 Ashley Dr S, Tampa, FL 33402  
(813) 314-7617  
[sales@powertechnologysolutions.net](mailto:sales@powertechnologysolutions.net)

