

JUICEPUMP™

Models: 100, 150, 200 kW



Offer flexible and scalable DC fast charging

JuicePump is a flexible DC fast charging (DCFC) solution that offers power levels ranging from 100kW to 200kW. Future-proofing your investment is easy with Enel X stations as they come equipped with both CHAdeMO and CCS type 1 connectors and deliver charging services to a variety of electric vehicles. JuicePump also offers a modular and field-upgradable configuration that minimizes upfront installation costs and matches the evolving requirements of your EV charging infrastructure. Built-to-last, JuicePump meets the need of high-utilization customers from re-fueling stations, to commercial fleets, to public parking.

Take advantage of EV infrastructure incentives and bring JuicePump to your property today:

- Attract more visitors to your business by offering high-speed EV charging
- Configure access and payment settings from the JuiceNet Enterprise smart charging dashboard
- Generate revenue with unattended payment terminal (UPT*) and in-app software payment options
- Invest in a future proof and field upgradable solution
- Installer friendly with compact and modular power unit design that supports up to 200kW per power cabinet

Why JuicePump?


<p>Faster charging</p> <p>Drivers can charge vehicles up to 80% in under 30 minutes</p>	<p>Eligible for incentives</p> <p>JuicePump is approved for utility and state-sponsored incentive programs including CALeVIP, MassEVIP and others</p>	<p>Flexible and easy installation</p> <p>Save on CAPEX with modular and field upgradable DCFC</p>
<p>Public charging network</p> <p>Join a fast-growing network serving thousands of EV drivers</p>	<p>Universal compatibility*</p> <p>CCS-1 and CHAdeMO compliance ensures compatibility with all EVs**</p>	<p>Smart charging software</p> <p>Use the JuiceNet software platform to restrict station access and collect payment</p>

*USA and Canada only

**Tesla requires CHAdeMO adapter


DISPENSER UNIT

Connectors	<ul style="list-style-type: none"> > Dual CHAdeMO and CCS (Type 1) 			
Cord Length	<ul style="list-style-type: none"> > 10.5ft (3,2 m) - CHAdeMO > 11.5ft (3,5 m) - CCS1 			
Output current	<ul style="list-style-type: none"> > CCS1 200A > CHAdeMO up to 200A 			
Output Voltage	<ul style="list-style-type: none"> > CCS1 200 Vdc to 950 Vdc > CHAdeMO 200 Vdc to 500 Vdc 			
Output Power	<ul style="list-style-type: none"> > 100kW, 150 kW, or 200kW depending on the power unit's configuration 			
Efficiency & Power Factor	Voltage (Vdc)	Power (kW)	Efficiency	Power factor
100 kW	400	10	87,69%	0,7659
	400	100	94,31%	0,9941
	800	10	88,80%	0,7763
	800	100	94,70%	0,9941
150 kW	400	10	86,54%	0,754
	400	140	92,60%	0,9964
	800	10	87,24%	0,7673
	800	150	92,93%	0,9968
200 kW	400	20	83,69%	0,8959
	400	140	94,50%	0,9955
	800	40	90,13%	0,9629
	800	200	94,72%	0,9976
Total Harmonic Distortion	<ul style="list-style-type: none"> > < 13% 			
Enclosure protection	<ul style="list-style-type: none"> > IP54, NEMA Type 3R 			
Temperature	<ul style="list-style-type: none"> > -30°C to 50°C (-31°F to 122°F) 			
Altitude	<ul style="list-style-type: none"> > 6000 ft 			
RFID	<ul style="list-style-type: none"> > RFID supported with standards: MIFARE ISO/IEC14443A/B, ISO/IEC15693, ISO/IEC 18000-3, FeliCa, NFC, EMV 2.0 			
Payment	<ul style="list-style-type: none"> > Optional UPT (universal payment terminal) that supports VISA, AMEX, MasterCard, Apple Pay and Google Pay 			
JuiceNet Enterprise Software	<ul style="list-style-type: none"> > Precision measurement of power, energy, voltage & current > Web-based portal: set payment rates and charging hours; monitor charging status and consumption data; control station access; load balancing > Driver app: monitors and pays for charging (iOS & Android) > Read more on the JuiceNet Enterprise datasheet 			
Weight	<ul style="list-style-type: none"> > 600lbs / 277 kg 			
Input Current for Auxiliary Services	<ul style="list-style-type: none"> > 120VAC-1P @20A 60Hz 			
Electrical Protection	<ul style="list-style-type: none"> > Short circuit; Over voltage: RCD 			
Dimensions	<ul style="list-style-type: none"> > 2464 mm (97 in) (H) x 559 mm (22 in) (W) x 381 mm (15 in) (D) 			
Certifications	<ul style="list-style-type: none"> > ETL (USA and Canada) for UL 2202, UL 2231, UL50E, NEC Article 625, CSA STD C22.2 No. 107.1, CHAdeMO, FCC Class A 			

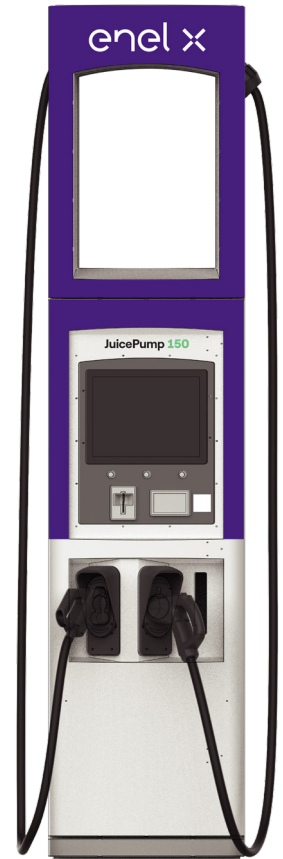

POWER UNIT

Input	> 480 VAC, 3 Phase, +10% / -15%
Input Overvoltage Category	> Category 3
Output Voltage	> 50 to 950V DC
Electrical Output	> Up to 100kW, 150kW, or 200kW
Supply Frequency	> 60 Hz
Temperature	> -30°C to 50°C (-31°F to 122°F)
Enclosure Protection	> IP54, NEMA Type 3R;
Network Connection	> 4G and Gigabit Ethernet
Dimensions	> 2083 mm (82 in) (H) x 1067 mm (42 in) (W) x 889 mm (35 in) (D)
Weight	> 1900lbs / 862kg
Communication Protocol	> OpenADR Certified. OCPP 1.6J with TLS1.2 encryption and Smart Charging Profile

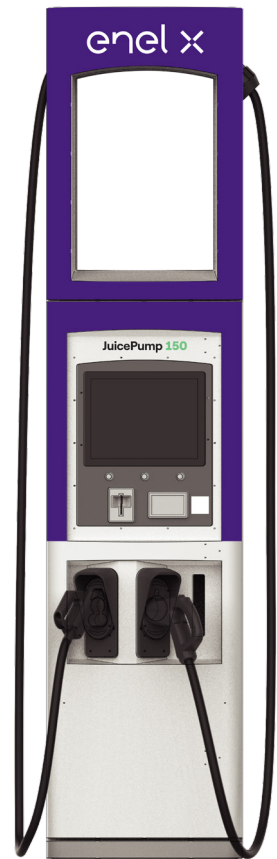

GRID Connection Parameters

Maximum Current	> 150kW: At 480 VAC 3-phase - 198A > 200kW: At 480 VAC 3-phase - 250A
Input Current for Auxiliary Services	> At 120VAC 1-Phase 20A
Overcurrent Protection	> 150kW: UL Listed 250A Breaker for 3-phase 480V, 25A Breaker for 1-phase 120V > 200kW: UL Listed 300A Breaker for 3-phase 480V, 25A Breaker for 1-phase 120V
Maximum Length For Buried Cable for AC Link as Described Above	> 152m (500ft)
Product Warranty	> 2 years