



Noodoe EV DC30PM



Smart EV Charging

Version 2.05

Width
23.2 in / 589 mm

Depth
19.3 in / 490 mm

Height
29.1 in / 740 mm

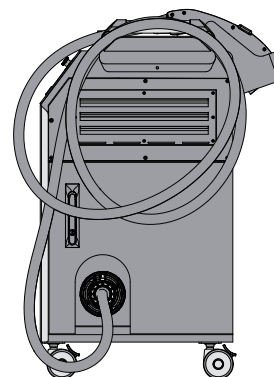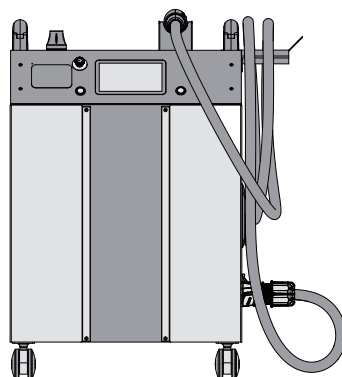

SPECIFICATIONS

Cloud service	Noodoe EV OS
Maximum output power	30 kW
Output power	CCS1: 60 A @150~500 Vdc or 31.5 A @950 Vdc
Vehicle connector	CCS1
Charging cable length	13 feet / 4 m
Input power	3-phase, 5-wire, 480 Vac, 47 A maximum
Grounding system	TN, TT
Efficiency	> 94%
Power factor	> 0.99
Display	7 inch LCD
Communication protocol	OCPP 1.6 JSON
Vehicle communication interface	ISO 15118
Network connectivity	Ethernet, Wi-Fi, 3G or 4G
RFID	RFID ISO/IEC 14443 A/B
NEMA enclosures(NEMA)	NEMA 3R
Impact protection	IK10
Electrical protection	Over current protection, over voltage protection, over temperature protection, under voltage protection, surge protection device, insulation monitoring device, short circuit protection, over power protection
Operating temperature	-22 °F to +122 °F / -30 °C to +50 °C
Dimensions	23.2 (W) x 29.1 (H) x 19.3 (D) in 589 (W) x 740 (H) x 490 (D) mm
Weight	176 lbs / 80 kg
Certifications	ETL, FCC